Legend


Clients Table

Referenced Table Name. If a column is an ID value, the table it refers to is listed in green. Notes.

Client Name

clName, clNameLast, clNameFirst clName is set from clNameFirst and clNameLast

Client ID clClientID

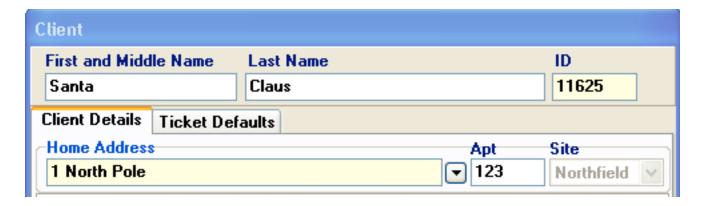

Client Home Address

clAddress2, clAdss2ID, clAdss2X, clAdss2Y Addresses clAddress2, clAdss2X and clAdss2Y are cached copies of data from the addresses referenced by clAdss2ID

Home Address Apt

clAdss2Apt
Apartment numbers are best stored in the client record and not with a specific address.

Home Address Site

clAdss2SiteID
SiteNodes
This references the sitenodes table, but is a cached copy of the value asSiteID in the addresses table.

Non Visible Client Data

clAITD

- 0: Active
- 1: Inactive
- 2: Relocated
- 3: Deceased
- 4: Deleted

clTimeStamp


Updated any time a client record is created or updated.

clPartition

For Easy Rides 3.2 and above, stores the default partition for the client record.

cl_SchAgent

Not currently recorded.

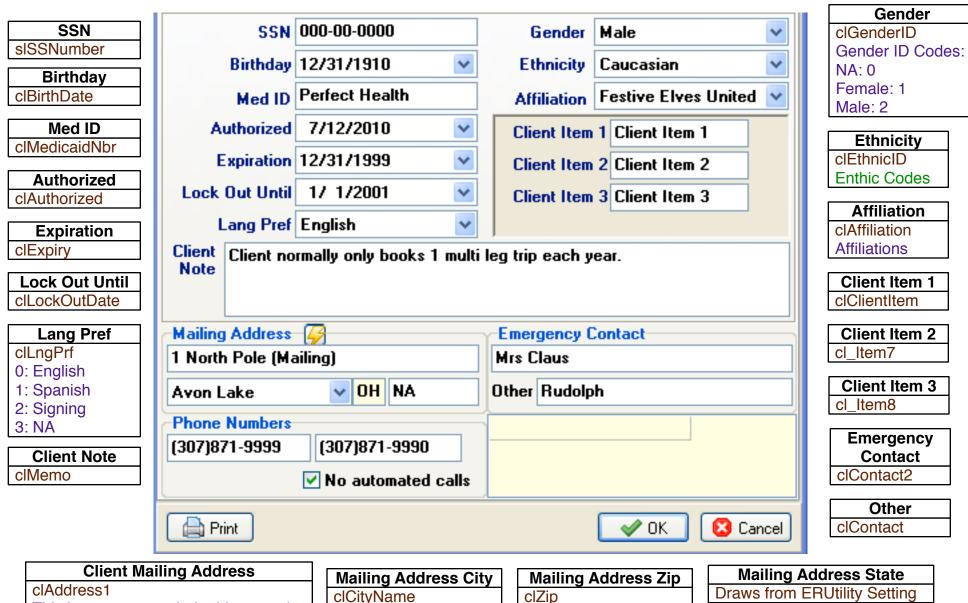

This is a non geocoded address and can accept values such as PO Boxes

Phone Number

clPhone, clPhoneAlt

The first phone number is the # that will be used for calling via the Easy Ride Reminder feature.

No Automated Calls

clDoNotCall

Boolean value.

0: Do not call.

1: Calls allowed.

Default PU Address


clDOA1ID, clDOA1
Addresses
clDOA1 is a cached copy of
data from the address
referenced by clDOA1ID. If a
default PU Address is not set,
Easy Rides will use the default
home address on the client
details tab.

Default PU Apt

clDOA1Apt
Apartment numbers are best stored in the client record and not with a specific address.

Default PU Adress Site

clCOA1SiteID
SiteNodes
This references the sitenodes table, but is a cached copy of the value asSiteID in the addresses table.

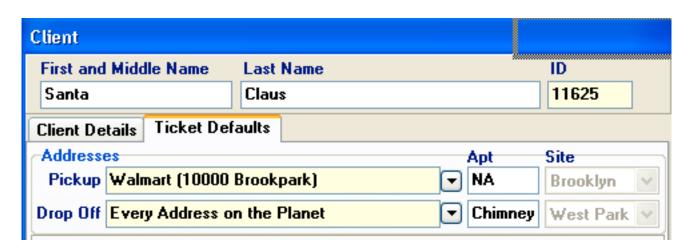

Default DO Address

clDOA2ID, clDOA2
Addresses
clDOA2 is a cached copy of
data from the address
referenced by clDOA2ID. Most
customers will have no DO
address set.

Default DO Apt

cIDOA2Apt
Apartment numbers are best stored in the client record and not with a specific address.

Default DO Adress Site

clCOA2SiteID
SiteNodes
This references the sitenodes table, but is a cached copy of the value asSiteID in the addresses table.

P. Funders
clFunderID
Funders

S. Funders

clFunderID1, clFunderID2, clFunderID3 Funders Up to 3 S. Funders can be selected.

Fare Rate

clRateTypeID
RateTypes
Only shows rate
types of Fare or
Universal

Spcl Needs

clSpclNdID Built into Easy

0: Ambulatory

1: Blind

Rides

2: Disabled

3: Hearing Impaired

4: Wheelchair

5: Walker/Cane

Vehicle Type clBusTypeID

Status


clStatusID Statuses

BusTypes

ProviderID
Providers

Purpose clPurposes Purposes

Fare Type
clFareTypeID
FareTypes

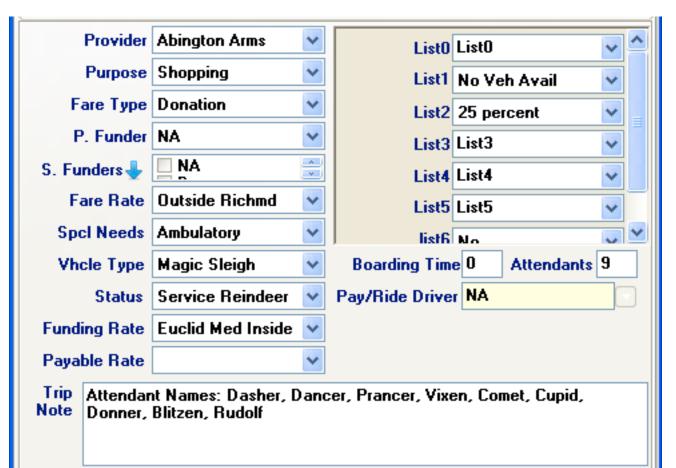

List0 clPermitCode

List1

List2 cl Item2

List3

cl Item3

List4

cl_ltem4

List5 cl EXItem5

List6 cl EXItem6

List7 cl EXItem7

Boarding Time clClientTime

Attendants clNbrAtndts

ehicle Type Funding Rate

clFundingRate
RateTypes
Only shows
rate types of
Funding or

Universal

Payable Rate
clPayableRateID
RateTypes
Only shows rate
types of Payable
or Universal

Trip Note clTrString

Pay/Ride Driver